

Numerical Analysis and Design of Highly Sensitive PCF Surface Plasmon Resonance Biosensor

Md. Sakib Ikbal¹, Md. Biplob Hossain², Jannatul Robaiat Mou¹, Md. Akramul Alim²

^{1,3}*Department of Electronics & Telecommunication Engineering Rajshahi University of Engineering & Technology, Rajshahi-6204, Bangladesh*

²*Department of Electrical & Electronic Engineering Bangladesh Army University of Engineering & Technology, Natore-6431, Bangladesh*

Abstract: A high sensitive photonic crystal fiber (PCF) based surface plasmon phenomenon (SPR) biosensor is numerically studied. In this structure, as a plasmonic material, Au is used because of its chemically activeness. And a layer of sensing medium is used outside of the fiber to make the structure effective. Any unknown analyte can be detected by placing or flowing it on the metal surface. Guiding properties and results are investigated using Finite element method (FEM). Results tell that maximum sensitivity is 4000nm/RIU as well as resolution is 2.5×10^{-5} RIU of this sensor.

Keywords: *Biosensor; PCF; SPR; SPP mode; Sensitivity*

Introduction: The surface plasmon is referred as the plasma oscillation which is localize at the surface or interface. "Plasmon" means quasi-particle representation of plasma frequency [1]. Plasma oscillation represents the phenomena that free electrons of the metal oscillate cooperatively from their equilibrium position [2-7]. In SPR measurement the change of refractive index change in nanometer range can be detected easily. For this reason SPR is used in different bio-sensing application such as detection of label free antigen-antibody reaction.

In the last couple of years, SPR biosensor has been created a remarkable place from the other biosensors because of its high sensitivity and reliable procedure [8]. Kretschmann configuration [8] is widely used in which a very thin layer of metal is directly deposited on the surface of coupling prism. It is bulky in size and difficult to optimize. Furthermore it cannot be used in remote sensing application. For removing this barrier of remote sensing optical fiber is used. Its advantage is that its core diameter is small that is why, it can be used in small areas along with the capability of remote sensing. In the last decade, PCF has been contributed for different applications owing to its several properties [9] and several types of sensor has been designed using PCF. The PCF SPR sensor are worked on evanescent field principle and it is produced because of propagation of light in the core-cladding region [10]. Owing to changing of analyte local refractive index (RI), the RI of the surface plasmonpolaritons (SPP) will be changed and finally, resonant wavelength will be also changed [10].

Article history:

Received 19 April 2017

Received in revised form 19 May 2017

Accepted 10 June 2017

Available online 30 June 2017

Corresponding author details:

E-mail : biplobh.eee@bauet.ac.bd

Tel: +880-1717-759838

Copyright © 2017 BAUET, all rights reserved

R.C. Jorgenson has propounded in [11], the very first optical fiber SPR sensor in where the core was coated by the Au film to exhibit plasmonic response. In [12], Polymer selectively coated PCF structure has been put forth by J. N. Das and R. Jha. Moreover, in [13] J. N. Das and R. Jha used multiple graphene layers in birefringence control PCF structure for SPR sensor. Previously the multiple metal layers are exercised in PCF SPR sensor and liquid infiltration inside the air holes or core [14]. Recently PCF SPR biosensors are designed by keeping the metal as well as sensing absorbate outside the PCF structure [15, 16].

Comprehensively as plasmonic material, gold and silver have been used. Among them, silver is preferable due to its most conductive nature, sharp peak and high detection accuracy compared to gold [17]. But silver can be easily oxidized and detection accuracy will be reduced. Silver oxidization can be prevented by using a thin layer of graphene on the silver layer [18]. But gold is chemically immutable and shows larger wavelength shift in resonant wavelength. As a result detection accuracy to detect unknown analyte is raised [16].

In this work, a regular hexagonal shaped PCF SPR biosensor has been proposed where the metal (gold) as well as sensing absorbate is placed outside the PCF structure. This reduces the fiber structure complexity and sensing process easier. Unknown analyte can be easily detected by flowing it or just placing it outside of the gold surface just in label free detection mode. Our structure is easy to construct in terms of fabrication.

Design Methodology: At the outer circle, six circles are omitted so that evanescent field can be flown to excite the metal surface. The cross section of our numerically proposed sensor has been shown in Fig. 1. A simple three ring, hexagonal PCF is designed for the SPR sensor.

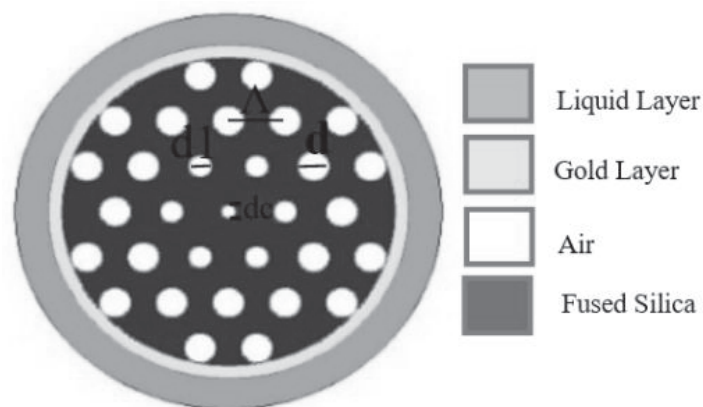


Fig. 1: Cross section view of propounded Sensor

According to the standard fibre drawing “Stack and draw” technique, the proposed fiber can be constructed. In our core guided mode, the air holes in the first ring act as low index cladding. It has been used to vacillate the phase matching with plasmonic mode by reducing the refractive index. Our sensor parameters are defined as pitch $\Lambda=1.7\mu\text{m}$, diameter of the first ring air hole

(d_1), the second air hole (d_2) and the diameter of the center air hole (d_c) are 0.4Λ , 0.55Λ and 0.25Λ respectively. Moreover, the thickness of the gold layer is defined to 40nm and it is about the ideal case. The real part of the dielectric constant of the gold has been defined from the Drude-Lorentz model [16]. The RI of silica has been taken by using Sellmeier equation [16].

$$n^2(\lambda) = 1 + \frac{B_1\lambda^2}{\lambda^2 - C_1} - \frac{B_2\lambda^2}{\lambda^2 - C_2} - \frac{B_3\lambda^2}{\lambda^2 - C_3} \quad eq. 1$$

Where $B_1 = 0.69616300$, $B_2 = 0.407942600$, $B_3 = 0.897479400$, $C_1=4.67914826 \times 10^{-3} \mu\text{m}^2$, $C_2=1.35120631 \times 10^{-2} \mu\text{m}^2$, $C_3=97.9340025 \mu\text{m}^2$ are the coefficients of Sellmeier equation [16] and n is the RI of the silica and λ is the wavelength in μm . We use finite-element method (FEM) and also use scattering boundary condition (SBC) on the outset layer to determine mode confinement behavior.

Results and Discussion: The working fashion of the PCF based on SPR sensor is evanescent electromagnetics field. For plasmonic phenomenon efficient excitation is the key factor. At a definite frequency of the exciting light, this can excite the surface and produce resonance. By using FEM based software such as “Comsol Multiphysics 4.4” framework has been used to simulate and analyze our proposed structure. Although, there is exists both the horizontal and vertical polarization. We consider only horizontal polarization here because vertical polarization is lesser compared to the horizontal polarization.

Fig 2 shows, the horizontal polarization property of fundamental core mode and surface plasmon mode.

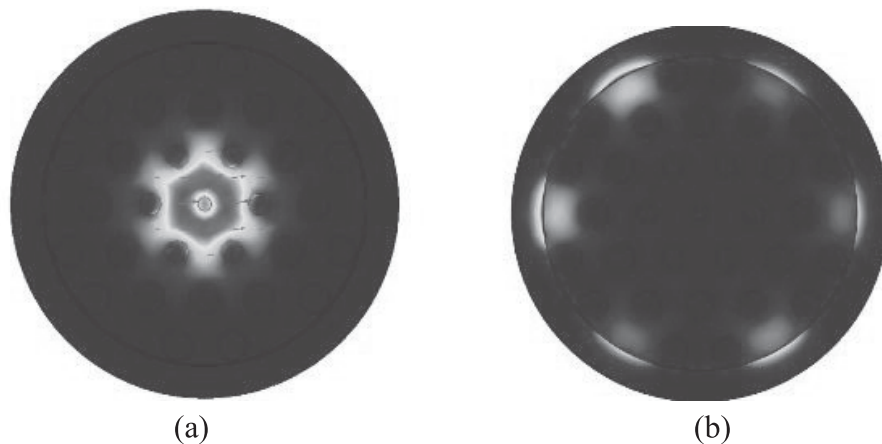


Fig. 2: Field properties of (a) core guided mode for x-polarization and (b) Surface Plasmon Polariton mode

As the mode propagates through the core, plasmon mode at the metal sensing layer is excited by the core mode. Resonance occurs when the real part of the local RI of the core mode and the

surface plasmon mode matches. At this specific point maximum modal loss is found. At maximum loss point imaginary value of RI of the core guided mode reaches to largest value. After this point, it has been noticed, modal loss is started decreasing again between core mode and plasmon mode. The modal loss of the fundamental core guided mode is extracted by the using the equation below [19].

$$\alpha = 8.686 \times k_0 \cdot \text{Im}[n_{eff}] \text{ dB/m} \quad \text{eq. 2}$$

Where $k_0 = 2\pi/\lambda$, λ are the wave number, wavelength in μm in free space.

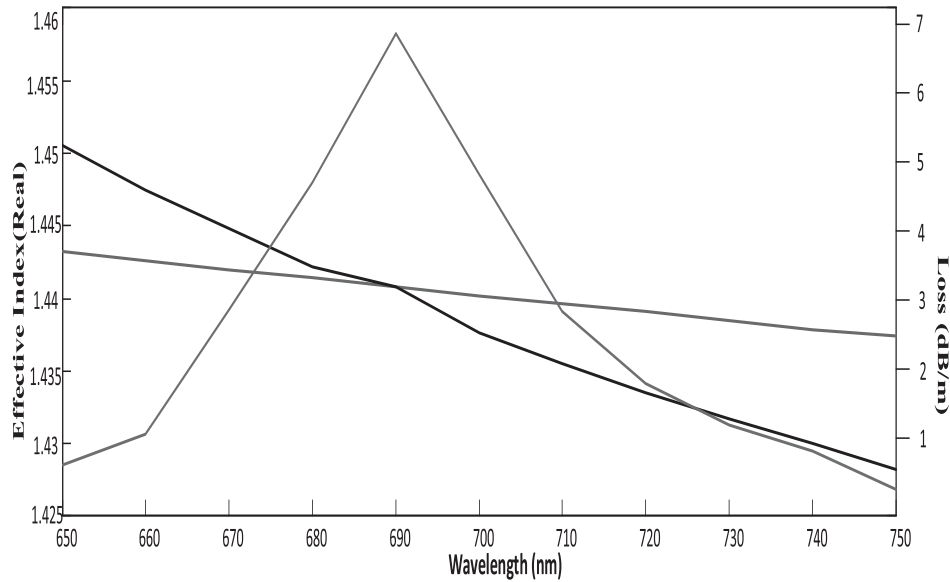


Fig. 3: Relation of dispersion of core mode and surface plasmonpolariton mode

Fig 3 shows that at 640 nm wavelength a very sharp peak is found. At that point real part of the core mode and SPP mode coincide. It defines that maximum power has transferred to fundamental core mode to SPP mode. Due to core cladding refractive index contrast sharp peak is found. Without influenced by other higher order plasmonics one resonance is found for fundamental mode. Sensing performance is indicated by the presence of resonance on the metal surface. At wavelength 640 nm phase matching phenomena is found where fundamental core mode, SPP mode and loss peak are well matched.

Our sensor is providing very sensitive results according to the analyte RI change. RI changing will change the phase matching phenomena between the core mode and SPP mode. RI change can be detected by measuring the loss spectra shift. By increasing the analyte RI loss spectra is shifted toward the higher wavelength. It is shown in the Fig 4.

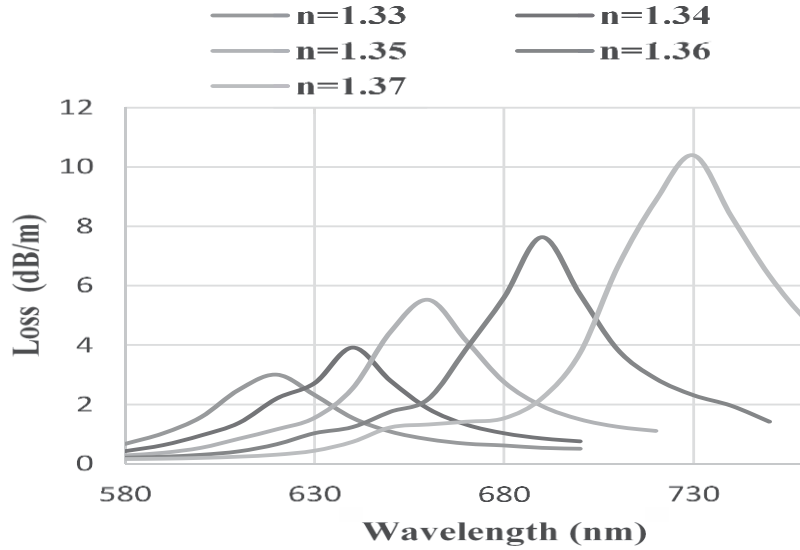


Fig.4: Loss spectrum profile of our proposed sensor by changing analyte RI from 1.33 to 1.3

Wavelength Interrogation Technique: The advantage of Wavelength Interrogation technique is that it has higher sensitivity as well as higher detection range compared to the Amplitude detection technique [10]. In this method RI variation is detected by measuring the resonance shift $\Delta\lambda_{peak}$. Sensitivity in this method is defined as [20].

$$S_{\lambda} \left[\frac{nm}{RIU} \right] = \frac{\Delta\lambda_{peak}}{\Delta n_a} \quad eq.3$$

Where n_a is the analyte refractive index. In this method positive RI sensitivity is found 4000 nm/RIU which is 4 time higher than the ref. [10] and 2 times than ref. [16]. For the analyte RI 1.34, 1.35, 1.36 and 1.37 resonant peak is found at 640,660,690 and 730 nm and corresponding sensitivity is found as 2000, 2000, 3000 and 4000 nm/RIU respectively. Only higher sensitivity does not mean that the sensor can detect analyte accurately. By measuring sensor resolution it is possible to find that the sensor can detect analyte accurately or not. If we presume the proposed sensor can detect 0.1 spectral resolutions then the sensor resolution is 2.5×10^{-5} RIU which is also better than ref. [10].

Amplitude Interrogation Technique: The advantage of this method is that this method is simple and cost effective because no spectral manipulation is needed here. Sensitivity in this method can be derived as in [10].

$$S_A(\lambda)[RIU^{-1}] = -\frac{1}{\alpha(\lambda, n_a)} \frac{\delta \alpha(\lambda, n_a)}{\delta n_a} \quad eq.4$$

Here, the overall propagation loss is denoted by $\alpha(\lambda, n_a)$ along the wavelength at a specific analyte RI as well as the difference between the loss spectra before and after the analyte RI change is denoted $\delta\alpha(\lambda, n_a)$. By using this method maximum 265 RIU^{-1} is found at 730 nm wavelength for the analyte RI of 1.37. Moreover amplitude sensitivities are found 81, 89 and 153 RIU^{-1} is found for 1.34, 1.35 and 1.36 RI. If we assume, 1% change in transmitted intensity can be sense accurately then the sensor resolution is found $3.7 \times 10^{-5} \text{ RIU}$.

Conclusion: A numerically PCF based SPR biosensor has been proposed and studied. The FEM method has been adopted to model the computational domain of the proposed sensor and a circular perfectly matched layer has been used outside the structure to abolish radiation toward the surface. Proposed sensor shows wavelength sensitivity of 4000 nm/RIU with resolution of $2.5 \times 10^{-5} \text{ RIU}$. Also the sensor shows the amplitude sensitivity of 265 RIU^{-1} with resolution of $3.5 \times 10^{-5} \text{ RIU}$. As the sensor is easy to fabricate by using draw and Stack method. Due to promising result and simple sensing scheme we believe that this sensor can be a good candidate for biological and biochemical analyte detection.

References:

- [1] M. Yamamoto, Surface Plasmon Resonance (SPR) Theory: Tutorial, Review of Polarography, 48(2002).
- [2] K. N. Shushama, MM Rana, R Inum, MB Hossain, Graphene coated fiber optic surface plasmon resonance biosensor for the DNA hybridization detection: Simulation analysis, Optics Communications, 383 (2017), pp. 186-190.
- [3] M. B. Hossain, M Rana, Graphene Coated High Sensitive Surface Plasmon Resonance Biosensor for Sensing DNA Hybridization, Sensor Letters 14 (2016), pp. 145-152.
- [4] M. B. Hossain, MM Rana, DNA hybridization detection based on resonance frequency readout in graphene on Au SPR biosensor, Journal of Sensors 2016(2016), pp. 1-7.
- [5] M. S. Rahman, MS Anower, MR Hasan, MB Hossain, MI Haque, Design and numerical analysis of highly sensitive Au-MoS₂-graphene based hybrid surface plasmon resonance biosensor, Optics Communications, 396 (2017), pp. 36-43.
- [6] M. S. Rahman, MS Anower, MK Rahman, MR Hasan, MB Hossain et. al, Modeling of a Highly Sensitive MoS₂-Graphene Hybrid Based Fiber Optic SPR Biosensor for Sensing DNA Hybridization, Optik-International Journal for Light and Electron Optics, (2017).
- [7] M. S. Rahman, MB Hossain, MM Rana, Sensitivity enhancement of porous silicon based SPR sensor using graphene-MoS₂ hybrid structure. In: Proceedings of ICECTE-2 Conference. RUET, Rajshahi, Dec., 2016. pp.1-4.
- [8] E. Kretschmann and Z. H. Raether, Radiative decay of non radiative surface plasmons excited by light, Z. Naturforsch., A. Phys. Sci., 23 (1968), pp. 2135–2136.
- [9] P. Russel, Photonic crystal fibers, Science, 299 (2003), pp. 358–362.
- [10] A. A. Rifat, G. Amouzad Mahdiraji, Y. G. Shee, Md. Jubayer Shawon, and F. R. Mahamd Adikan, A Novel Photonic Crystal Fiber Biosensor Using Surface Plasmon Resonance, Procedia Engineering, 140 (2016), pp. 1–7.
- [11] R. Jorgenson, and S. Yee, A fiber-optic chemical sensor based on surface plasmon resonance, Sens. Actuators B Chem., 12 (1993), pp.213-220.
- [12] J. N. Dash, and R. Jha, SPR Biosensor Based on Polymer PCF Coated With Conducting Metal Oxide, IEEE Photon. Technl. L., 26 (2014), pp. 595-598.

- [13] R. Jha, and J. Dash, Graphene Based Birefringent Photonic Crystal Fiber Sensor Using Surface Plasmon Resonance, *IEEE Photon.Tech.L.*, 26 (2014), pp. 1092-1095.
- [14] P. J. Sazio, A. Amezcua-Correa, C. E. Finlayson, J. R. Hayes, T. J. Scheidemantel, and N. F. Baril, Microstructured optical fibers as high-pressure microfluidic reactors, *Science*, 311 (2016), pp. 1583-1586.
- [15] R. Otupiri, E. Akowuah, S. Haxha, H. Ademgil, F. Abdel Malek, and A. Aggoun, A Novel birefringent photonic crystal fibre surface plasmon resonance biosensor, *IEEE Photonic J.*, 6 (2014).
- [16] A. Rifat, G. Amouzad Mahdiraji, Y. M. Sua, Y. G. Shee, R. Ahmed, D. M. Chow, et al., Surface Plasmon Resonance Photonic Crystal Fiber Biosensor: A Practical Sensing Approach, *IEEE Photon. Techn. L.*, (2015) p. 1.
- [17] A. Rifat, G. Mahdiraji, D. Chow, Y. Shee, R. Ahmed, and F. Adikan, Photonic Crystal Fiber-Based Surface Plasmon Resonance Sensor with Selective Analyte Channels and Graphene-Silver Deposited Core, *Sensors*, 15 (2015), pp. 11499-11510.
- [18] V. Kravets, R. Jalil, Y.-J. Kim, D. Ansell, D. Aznakayeva, B. Thackray, et al., Graphene-protected copper and silver plasmonics,"*Scientific reports*, vol. 4 (2014).
- [19] R. A. Aoni, R. Ahmed, M. M. Alam, and S. A. Razzak, Optimum design of a nearly zero ultra-flattened dispersion with lower confinement loss photonic crystal fibers for communication systems, *Int. J. Sci. Eng. Res.*, vol. 4 (2013), pp. 1-4.
- [20] B. Gauvreau, A. Hassani, M. Fassi Fehri, A. Kabashin, and M. A. Skorobogatiy, Photonic bandgap fiber-based Surface Plasmon Resonance sensors," *Opt. Express*, vol. 15 (2007), pp. 11413–11426.